

Human-agents Interactions in Multi-Agent Systems: A Case Study of Human-UAVs Team for Forest Fire Lookouts

Sagir Muhammad Yusuf and Chris Baber*

*University of Birmingham, B15 2TT, U.K.
smy870@student.bham.ac.uk, c.baber@bham.ac.uk*

Keywords: Human-agent Team, Mixed-initiative Reasoning, Bayesian Learning, Mixed-initiative Planning.

Abstract: In this paper, we propose an architecture that uses predictions tools obtained via Bayesian learning algorithms to monitor the issues of communication, fault tolerance, and adaptation in human-agent mission. The architecture describes different level of knowledge, planning, and commands differ by their priorities. We tested the model using forest fire lookouts problem on a simulation platform (AMASE). The process uses the conjugate gradient descent algorithm to perform the Bayesian Belief Network training. The output of the training process is a well-trained BBN for agents' prediction, estimation, and decision making during communication failure. The prediction perfection of the human and agents were compared and studied. Although results proof that human approach is prone to error but is good in terms of emergency commands execution. We suggested that the use of a well-trained prediction tool (i.e., the output BBN) could be used in monitoring mission during communication link, hardware, or software breakdown.

1 INTRODUCTION

The human-agents team is applicable in many real-world applications such as health care system (Kifor et al., 2006), customer service system (Tecuci et al., 2007), disaster management (Cacace et al., 2014), etc. During the interaction, both participants need to be supportive to each other in order to have a collaborative system. A fully collaborative system tries to balance the knowledge and reasoning between the agents and the human experts. Unlike intelligent assistant where human has knowledge but consult agent for manipulation purposes or its opposite tutorial assistant (Rich and Sidner, 2007). In order to achieve that, several issues exist such as effective task distribution, communication, awareness, control, structuring, evaluation, adaptation (Makonin et al., 2016; Tecuci et al., 2007), and fault tolerance. We here discuss the problems sequentially.

Task distribution refer to the way of segmenting the task and choosing the task performer (Turpin et al., 2014). That is the issue of who does what task. The problem becomes complicated in heterogeneous agents management because of the presence of different types of agents. Communications refer to the mode of receiving commands and knowledge be-

tween the collaborative participants (i.e., human-and the agents) during the mission (Makonin et al., 2016). It mostly occurs via the use of Graphical User Interface (GUI) structured in what-next approach. Awareness refers to how the human and agents understand the current situation. That is the level of knowledge of the participants about the current condition of the environment (Tecuci et al., 2007). A more advance approach is reasoning the current situation and predicting the near future events known as the Situation Awareness (Endsley, 1995). Control refers to who will take over initiative at a particular time (Tecuci et al., 2007). It is the question of who is the current boss. Structuring issues refers to the architectural design of the human-agent system. That is how the component of the system was organised (Makonin et al., 2016). Evaluation refers to the critical analysis of the participants' tasks and the expected benefits in-between the human and the agents (Tecuci et al., 2007). Adaptation refers to how the agents and the human learn their environment and mode of operations (Makonin et al., 2016). The seven aforementioned aspects refer to the essential aspects of human-agent interaction, they relied on an effective communication platform. We suggest the consideration of hardware or software failure during the interaction process that could result in communication failure.

These challenges were itemised and solved in

* <https://www.Birmingham.ac.uk/staff/profiles/computer-science/baber-Chris.aspx>

many kinds of literature works with the assumptions of reliable hardware, software, and communication link (Bevacqua et al., 2015; Cacace et al., 2014; Ferguson and Allen, 2007). In this paper, we recommend the consideration of hardware or software breakdown (i.e., fault tolerance) that could result in communication and awareness updates failure. Fault tolerance is the ability of the team to manage any unexpected incident such as communication link breaking, hardware, or software error, and all other sort of Byzantine failures (Araragi, 2005). Therefore, we intend to answer the following questions in human-agent interaction.

- Is there any approach for tackling communication failure in human-agent team?
- In the presence of faulty communication link, hardware, or software, could agents and human team maintain the same environmental awareness through appropriate adaptation?

The first question was thrown on the effect of communication failure during the human-agent mission and how it affects both agent and human knowledge of the environment. This could be categorised into two levels. (1) agent-to-agent updates problem, especially in a multi-agent system, and (2) human-agent update. For instance, one could wonder the outcome of human-UAV surveillance mission with communication failure in the middle of the mission. The mission could face the following challenges:

- Incomplete data and command management: it happens when an agent or human proposes a command, then the command was not successfully received or executed due to communication failure occurrence.
- Agents power management.
- Lack of supportive knowledge: because of communication breakdown, the agents and human will lack supportive advice. For example, if the agents are familiar with their environment, they can be able to suggest some supportive ideas and insights about any destructive actions of human experts and vice versa.

To address the aforementioned issues, we propose a model architecture that utilises collaborative activities in a human-agent team using Bayesian inference and learning. Its constraints are the absence of communication and the prediction accuracy of the predictive tools for effective system Situation Awareness maintenance.

2 RELATED WORK

In human-agent team, agents are capable of making huge computations, navigation, and large data collection, etc. within a short period while the human expert is intelligent enough to extract the information, and control the mission cognitively (Makonin et al., 2016; Rich and Sidner, 2007; Tecuci et al., 2007). A challenge therefore arises in controlling the human-agent activities such as control, task allocation, communication, etc within the system.

Different architectures were proposed in managing aspects of human-agent team management. For instance, system control can be managed using parallel or full execution. In parallel control, the agents and the human experts learn concurrently and evaluate their outcomes against the objective function satisfactions on a time-to-time basis (Tecuci et al., 2007). After the parallel execution, the agents and the human learn their errors and avoid them in future missions based on prioritised tasks. Example of systems that implement such techniques are Diamond-Help and Collagen (Rich et al., 2001; Rich and Sidner, 2007).

Overall control involves the precise observation of the co-participant's actions and learns from their actions. The user may guide the agent about the current situation of the environment, while at the background; the agent is learning and correcting its errors and mistakes. The same thing goes to the human expert in the absence of enough knowledge; the agent can guide him/her using a what-next strategy as in RESIN (Yue et al., 2010), PerCon (Su, , 2014), ForceSpire (Endert et al., 2014), and ALIDA (Green et al., 2010). Other aspects, such as adaptation, awareness, control, evaluation, and system design, were addressed in (Makonin et al., 2016; Tecuci et al., 2007).

This paper suggests the consideration of system components failures that could result in communication, awareness, and adaptation problems. For example, imagine a communication failure in human-UAV team mission at a separation distance of 2 kilometres with critical battery conditions. How does the agents that rely on human-expert for control could save the mission by continuing with the tasks and ensure perfect mission delivery? Is there any balanced platform for monitoring the teams at the absence of the communications links? We pay more emphasis on this issue and propose a model that will maintain the balance between the two mission's participants. This model uses an accurate predictive tool that handles uncertainties and runs a parallel system with synchronisation, unlike the traditional approach of recovery.

Regarding awareness handling, DiamondHelp and

Collagen system (Rich et al., 2001; Rich and Sidner, 2007) uses a chat window to maintain the current understanding of the environment. While the STC system learns from the previous users' experience in line with commands execution. The propose model varies by focusing more attention on the accuracy of the prediction tool and current situation awareness analysis of the system during components failure. The model tackles the awareness problem using two approaches:

- Analysing current situation.
- Making effective predictions and estimations on the future situation.

It is similar to the concept of Situation Awareness in (Endsley, 1995; Stanton et al., 2006) but formalise with inferential reasoning and fault tolerance. Next section describes the model in details.

3 THE PROPOSE MODEL

This section introduces the proposed model and architecture, which intends to approach the problems of awareness and fault tolerance in human-agent team. It uses Bayesian inference and learning in solving the issues. Figure 1 describes the model architecture.

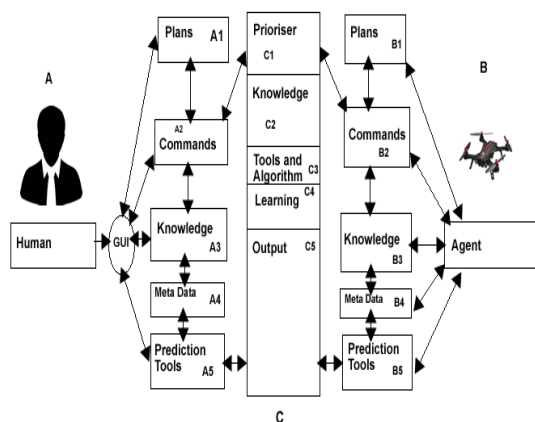


Figure 1: The Propose Model Architecture.

The proposed model has three entities, that is, human, agent, and the intermediary server labeled A, B, C in figure 1. We here below explain all these components.

3.1 Human Expert (a)

The human-expert refers to a professional person that has knowledge of controlling, structuring, and executing the mission. For example in fire fighting, he/she could be a well-experienced fire warden officer that witness many complex and simple cases. In a case where agents are exposing to a new environment, the

human expert could have more priority in controlling the mission's plans, commands, and data flow.

3.1.1 Human Plans (A1)

These are set of to-do actions by the agents propose by the human expert. It could be a queue or stack of actions to be performed during the mission by the agent. For instance, in fire lookouts missions, it could be a set of places to be visited in sequential order.

3.1.2 Human Commands (A2)

Current executing plan is refer to as a command. This module is responsible for monitoring the human commands and prioritising them. It monitors the plans execution states such as completed, interrupted, non-executable. A command could be mark as complete when it was opportune to execute all its actions. An interrupted command is a command that was removed during execution due to encountering of higher priority command or lack of available resources (e.g., battery and computational power) to execute the command.

3.1.3 Human Knowledge (A3)

Human knowledge refers to the expert's suggestions and actions for controlling the system. It could be inputted via the Graphical User Interface (GUI) and pass to the hidden server (C) or agent (B) via communication link. Human or agent knowledge could be updated or prioritise best on the evaluation by the team in optimising the objective functions.

3.1.4 Human Metadata (A4)

All updates records about the mission are recorded as the metadata. This could be used to traced the mission and also be used for training purposes. It could be exposed to learning algorithms such as gradient descent, expectation maximisation, counting algorithms etc. (Bottou, 2010; Dempster et al., 1977; Romanycia, 2019) to obtain a well-train BBN for making accurate predictions, estimation and decisions.

3.1.5 Human Prediction Tools (A5)

Human predictive tools refers to the well-trained tools (e.g, trained BBN) for helping the expert in making predictions estimations, and conclusions. That is, it is the output of the training process using the available knowledge. It could be used to estimate or predict what the agent is doing during the mission or in near future.

3.2 The Agent (B)

Agent refers to any autonomous hardware entity that is capable of helping the expert in achieving the mission. For example, UAV, wheel-robots, legged robots etc. As an autonomous entity, agent is capable of generating its plans and executes them. It could also receive other plans and commands from the human expert.

3.2.1 Agent's Plans (B1)

As an autonomous entity, agents could have some strategies of generating and monitoring their plans by following certain algorithms. At times agents and human plans contradict each other when that happens, the model proposes C1 (figure 1) to prioritise and decide on which plan to be executed.

3.2.2 Agent's Commands (B2)

Agents execute their plans in a certain structures such as queue, stack, etc. The conflict between an agent and human commands could be resolved by the prioritiser C1.

3.2.3 Agent's Knowledge (B3)

Agents' knowledge comes from the sensor data, which could be organised in a situation-based manner. The agent's knowledge is managed by the human expert or the prioritiser (C1 figure 1) by using different techniques.

3.2.4 Agent's Metadata (B4)

During mission execution, agents' sensors information and other valuable data about the environment (e.g., time, location, etc.) are recorded as metadata to the agents. These data can be used for learning purposes using any suitable learning algorithms.

3.2.5 Agent's Prediction Tools (B5)

This is a set of predictions tools such as well-trained Bayesian Belief Network (BBN) and neuro-fuzzy system to be used by the agent in making predictions, estimations, and decisions during the absence of communication link between it and the human expert.

3.3 Connector Server (C)

The connector server comprises the computer that provides the Graphical User Interface (GUI) for communication and the communication link. For example, in human-UAV mission, it could be the linking

the agent, human expert, PC or mobile phone (as described by figure 2).

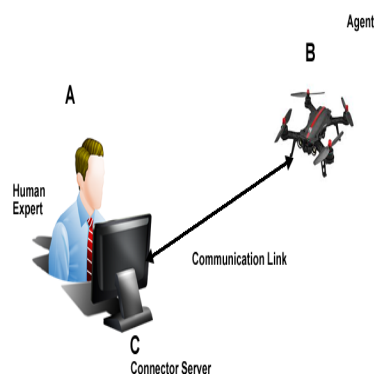


Figure 2: Structure of Human-agent Interaction.

Figure 2 describes the global view of figure 1, It shows the human labelled as (A), the agent (B), and the connector PC (C). The communication link (e.g., wireless Local Area Network) connects the human expert, connector server, and the agent.

3.3.1 Prioritiser (C1)

Prioritiser assigns a probability values to plans and commands for agents' execution. It a very important module residing in the connector server. It is capable of doing that because of the following reasons:

- It receives the knowledge of both human and the agent. When human sends a command, the server monitors the agent's actions on the command and learns the whole interaction.
- It has high computational capacity.
- It controls the communication link.

Therefore, by considering the aforementioned reasons, the prioritiser have enough resources for prioritising tasks. But the human expert also have an ability to execute an emergency plans.

3.3.2 Knowledge (C2)

The server has the global view of the systems because it receives data from both human and agents. It monitors and assesses its knowledge based on the satisfaction of the command's output. The server knowledge could simply be referred to as the combination of both the agents and human knowledge contributions.

3.3.3 Tools and Algorithms (C3)

This module comprises of the software to be used in structuring knowledge for learning process such as

the use of Bayesian Belief Network (BBN) in modelling agents' knowledge. The selection of the learning algorithm depends on the nature of the data at hand. For instance, counting algorithm fits diagnostic problems. But when the data contain latent variables, conjugate gradient descent or expectation maximisation algorithms could be the best options (Bottou, 2010; Dempster et al., 1977; Romanycia, 2019).

3.3.4 Learning (C4)

The learning process is responsible for handling the data, manage its uncertainty, and control the learning process. The uncertainty could be inputted to the learning algorithms in one of the following ways (Romanycia, 2019):

- Restricted or unrestricted range: in this approach, agents can send ranges of knowledge of BBN values. For example, temperature = [250-300], i.e., the value of the temperature is between 250-300 or temperature >30 degrees Celsius.
- Possibility or impossibility list: Setting a list of the possible values or negating the list to show impossibilities in these values. For example temperature = {200, 250, 300} or temperature = \neg {200, 250, 300}
- Likelihood: the set of likelihood probabilities can be attached to the possible variables in restricted or unrestricted form. For instance, temperature = {200 .8, 250 .1+-1, 300 .1}.
- Complete or incomplete certainty: It happens when the BBN has a complete doubt about the variable, or it has no doubt on the variable by providing its value to the BBN as "?" or actual values.

The output of the learning process is a well-trained BBN (i.e., if BBN were used in modelling the agent's knowledge) serve as the output C5.

3.3.5 Output (C5)

The output of the learning process could be an accurate prediction tool (e.g., well-trained Bayesian Belief Network, neuro-fuzzy system, etc.). The accuracy of the prediction tool could be measured by considering how many times the network predicted a wrong values known as prediction accuracy rate (Romanycia, 2019). It could be ranged between 0 and 1 with 0 being the best. The choice of the threshold depends on the programmer's choice and learning environment. In case of highly changing environment, the learning algorithms could be augmented to prioritised recent data as in (Bottou, 2010; Romanycia, 2019).

The output network could be replicated to both agent and human side as their predictive tool in synchronous or asynchronous mode (as discussed in section 3.3.1). The higher the mission data, the higher the perfection of the learned BBN as tested in our experiment. Therefore, this architecture is limited to the availability of data. In order to solve that issue, we propose the use of fuzzy logic (set of heuristic to monitor the prediction (Dernoncourt, 2013)) or expert input (to fill in the conditional probability of the BBN) in the absence of data.

4 IMPLEMENTATION OF THE MODEL ON REAL-WORD PROBLEM OF FOREST FIRE LOOKOUT

We tested the model on the problem of wildfire searching. Forest fire is one of the world's major problems, it kills lots of human and animal lives, destroy millions of acres of land, and affect the climatic conditions (Ingle, 2011). We use a team of multi-rotors and fixed-wing UAVs mounted with fire detecting sensors (camera) simulated on Aerospace Multi-agent Simulation Environment – AMASE (afriq, 2019). The belief of the agent was modelled using Bayesian Belief Network (BBN) on Netica (Romanycia, 2019). Each agent is updating its BBN, and the data is recorded at the metadata section for training purposes. We assume the structure in figure 2.

Figure 3 describes two quadrotors and two fixed-wing UAVs conducting forest fire searching. The inset picture shows a human expert from the control station room with a PC server and could communicate with the agents. The human expert is capable of seeing all the UAVs data, as described in figure 4 on AMASE.

From figure 4, the places mark with alphabets denotes:

- A represents the UAVs.
- Places marked B and C are the fires.
- D is the UAV's information (speed, position, heading, altitude, etc.) visible to the human expert via the PC connector at the base station..
- E is the sensor data of the UAVs.
- F is the battery level of the UAVs, and
- G is the environmental information sensor data such as wind speed, wind direction, etc.

The agents could start with an in-built autonomous searching approach. We use levy flight of (Chawla



Figure 3: Demonstration of Human-UAVs Team for Forest Fire Searching.

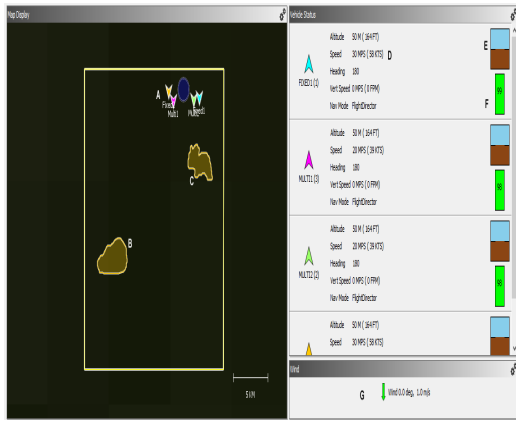


Figure 4: Implementation of the Propose Architecture on AMASE.

and Duhan, 2018) to monitor the UAVs waypoints generations for searching activity. The agents' belief was modelled using Bayesian Belief Network on Netica (Romanycia, 2019) as describe by figure 5.

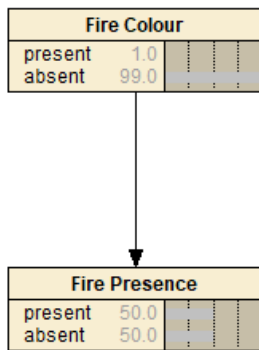


Figure 5: Bayesian Belief Network for Monitoring the UAVs Belief on Fire Presence.

Figure 5 describes the BBN for monitoring the UAVs belief on fire presence. Once the UAV's sensor detects

the fire, it will update the network and its metadata for training purposes.

5 EXPERIMENTS AND RESULTS

This section describes the methodology and results of each phase (stage of the model), implemented using AMASE (afriq, 2019) and Netica (Romanycia, 2019) on the forest fire problem discuss in section 4. All experiments were run on PC with 8GB RAM, intel core i3-6006U @ 2GHZ, and I terabyte external storage.

The clear idea of the process is the ability to obtain a nice prediction tool that synchronises both agent and human expert in the absence of communication. We use conjugate gradient descent algorithm to train the Spatio-temporal BBN (figure 6) to produce a possible location and action of UAV at a given time. Therefore, during communication, hardware, or software failure the agents can continue with their mission, and the human expert could be able to predict the possible location and action of the agent at a given time.

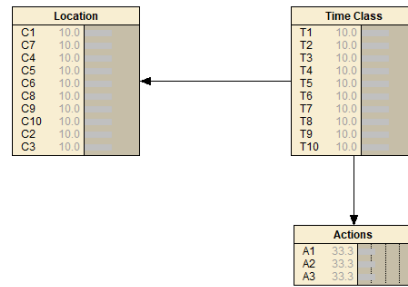


Figure 6: Bayesian Belief Network for Monitoring the mission clock, agent's location, and actions.

Figure 6 describes a simple BBN for monitoring the agents' actions, location, and time. The location refers to segmented grids of small sizes say (2meters square). Time class refers to the time range of the mission clock, e.g., 12:00-12:05. The actions of the agent (e.g., searching, loitering, projection etc) at a particular time are recorded for training purposes. The BBN simply says that, at every time t, the UAV has location and action doing, this could be predicted by filling of the BBN conditional probability values using the mission's sensor data. If the BBN is well-trained (perhaps with the prediction error rate of at most 0.1-0.3 out of the worse 1, depending on the availability of training data and nature of the environment), it could be used to trace what action UAV is doing, in which location at a particular time more especially in a static mission by given the conditional probabilities obtained from

the learning process. The model could work in dynamic missions by prioritising the learning data as in (Romanycia, 2019). The learning algorithms are also capable of handling latent variables.

5.1 Testing the Model on Forest Fire Searching

We tested the model using forest fire searching problem introduced in section 4 using a team of UAVs as agents simulated on Aerospace Multi-agent Simulation Environment -AMASE (afrl rq, 2019). In order to compare the perfection of these techniques, we tested both the agent’s BBN prediction error rates and the human prediction perfection. The UAV is continually generating random waypoint using the bio-inspired levy flight searching technique of (Chawla and Duhan, 2018). We evaluate the human expert part by exposing ten volunteer participants to the system and then monitor their guess accuracy on waypoint locations at a particular time. Table 1 describes the prediction error of the respective BBN.

Table 1: Prediction Error Rate Comparison between UAV and Human Entry of BBN conditional Probability Table Values.

BBN Entry Source	BBN Prediction Error	Number of Training Data
Human Expert	0.815	Number of participants: 10
UAV	0.505	1000
UAV	0.303	2000
UAV	0.216	3000
UAV	0.166	4000

6 DISCUSSION

From the results in table 1 section 5, one can notice that the UAVs learning prediction error rate is less than the human error rate. This is unsurprising because the agents are generating their waypoints base on a stochastic bio-inspired random approach(levy flight), and human could not be able to predict what will happen next. However, the human expert entry to the system is essential in terms of emergency commands execution for the safety of the UAVs, as discussed in section 3. Another claim is that the prediction error of the UAVs reduces with an increase in the number of training data (table 1). The utilisation of the training data to achieve the maximal outcome was

mark as future work.

6.1 Effect of the Model on Forest Fire Searching

In terms of communication breakdown or (hardware breakdown), the learned prediction error could be used in making accurate predictions estimations, and decision to control the mission. For example, let us assume a power breakdown at the base station during the human-UAV fire searching describe in section 4, the based station could be able to trace their UAV energy level, failure location (in case it finishes its battery), location, etc. This removes the necessity of using communication in human-agent interaction popularly known as mixed-initiative reasoning and planning as in (Bevacqua et al., 2015; Cacace et al., 2014; Ferguson and Allen, 2007; Makonin et al., 2016; Tecuci et al., 2007). In terms of adaptation, the BBN in figure 6 describes the way of adapting to the environment by the agent through the provision of conditional probabilities learning.

Therefore, finally, we here argue that accurate prediction tools obtain via join human-machine learning can help in monitoring mission during communication failure and enhance the adaptation in a human-machine team.

7 CONCLUSIONS AND FUTURE WORK

We proposed an architecture for monitoring the human-agent team by utilising the best part of the entities knowledge and producing accurate prediction tools through the use of machine learning algorithms (gradient descent or expectation maximisation). We modelled the agents’ belief using Bayesian Belief Network (BBN) and expose it to training data. In order to test the proposed model, we used a forest fire monitoring by a team of UAVs and human expert in the base station. The human prediction proofs to be inaccurate as expected but very useful in terms of emergency control. We were able to get the prediction accuracy of 0.166 by training the BBN using 4000 samples of the agent’s data. This is pretty good for making estimation, predictions, and decision in the absence of accurate communication. In terms of the highly changing environment, we propose the augmentation of the learning algorithms to prioritise recent cases as in the fading strategy of (Romanycia, 2019).

In the future, we will introduce a clear strategy

for the distributed learning process between the agent and the human experts. This will propose a complete concept of parallel learning. We are also planning to optimise the learning data and dig deeper to explore the nature of the prediction accuracy, and it is relevant to the available data. Although our model introduces faults tolerance and communication failure or reduction, a comparative analysis with other systems in (Makonin et al., 2016; Tecuci et al., 2007) using real agents marked as future work. We will also look at how the model and the predictions tools act in a highly changing environment.

ACKNOWLEDGEMENTS

We appreciate the effort of Petroleum Technology Trust Funds (PTDF) of Nigeria for sponsoring this project.

REFERENCES

- afri rq (2019). <https://github.com/afri-rq/OpenAMASE>. afri-rq. original-date: 2017-05-07T13:17:17Z.
- Araragi, T. (2005). Fault tolerance for internet agent systems: In cases of stop failure and byzantine failure. AAMAS '05, page 123–124, New York, NY, USA. ACM. event-place: The Netherlands.
- Bevacqua, G., Cacace, J., Finzi, A., and Lippiello, V. (2015). Mixed-initiative planning and execution for multiple drones in search and rescue missions. ICAPS'15, page 315–323. AAAI Press. event-place: Jerusalem, Israel.
- Bottou, L. (2010). Large-scale machine learning with stochastic gradient descent. page 10.
- Cacace, J., Finzi, A., and Lippiello, V. (2014). A mixed-initiative control system for an aerial service vehicle supported by force feedback. pages 1230–1235. 2014 IEEE/RSJ International Conference on Intelligent Robots and Systems.
- Chawla, M. and Duhan, M. (2018). Levy flights in meta-heuristics optimization algorithms – a review. *Applied Artificial Intelligence*, 32(9-10):802–821.
- Dempster, A. P., Laird, N. M., and Rubin, D. B. (1977). Maximum likelihood from incomplete data via the em algorithm. *Journal of the Royal Statistical Society. Series B (Methodological)*, 39(1):1–38.
- Dernoncourt, F. (2013). Introduction to fuzzy logic. page 24.
- Endert, A., Hossain, M. S., Ramakrishnan, N., North, C., Fiaux, P., and Andrews, C. (2014). The human is the loop: New directions for visual analytics. *J. Intell. Inf. Syst.*, 43(3):411–435.
- Endsley, M. R. (1995). Toward a theory of situation awareness in dynamic systems. [Online; accessed 2019-11-14].
- Ferguson, G. and Allen, J. (2007). Mixed-initiative systems for collaborative problem solving. *AI Magazine*, 28(2):23–23.
- Green, T. M., Maciejewski, R., and DiPaola, S. (2010). Alida: Using machine learning for intent discernment in visual analytics interfaces. pages 223–224. 2010 IEEE Symposium on Visual Analytics Science and Technology. ISSN: null.
- Ingle, L. B. (2011). Every day is fire day: A study of historic fire towers and lookout life in the great smoky mountains national park. page 136.
- Kifor, T., Varga, L. Z., Vazquez-Salceda, J., Alvarez, S., Willmott, S., Miles, S., and Moreau, L. (2006). Provenance in agent-mediated healthcare systems. *IEEE Intelligent Systems*, 21(6):38–46.
- Makonin, S., McVeigh, D., Stuerzlinger, W., Tran, K., and Popowich, F. (2016). Mixed-initiative for big data: The intersection of human + visual analytics + prediction. pages 1427–1436. 2016 49th Hawaii International Conference on System Sciences (HICSS).
- Rich, C. and Sidner, C. L. (2007). Diamondhelp: A generic collaborative task guidance system. *AI Magazine*, 28(2):33–33.
- Rich, C., Sidner, C. L., and Lesh, N. (2001). Collagen: Applying collaborative discourse theory to human-computer interaction. *AI Magazine*, 22(4):15–15.
- Romanycia, M. (2019). Netica-j reference manual. page 119.
- Stanton, N. A., Stewart, R., Harris, D., Houghton, R. J., Baber, C., McMaster, R., Salmon, P., Hoyle, G., Walker, G., Young, M. S., Linsell, M., Dymott, R., and Green, D. (2006). Distributed situation awareness in dynamic systems: theoretical development and application of an ergonomics methodology. *Ergonomics*, 49(12-13):1288–1311.
- Tecuci, G., Boicu, M., and Cox, M. T. (2007). Seven aspects of mixed-initiative reasoning: an introduction to this special issue on mixed-initiative assistants. *AI Magazine*, 28(2):11–11.
- Turpin, M., Michael, N., and Kumar, V. (2014). Capt: Concurrent assignment and planning of trajectories for multiple robots. *The International Journal of Robotics Research*, 33(1):98–112.
- Yue, J., Raja, A., and Ribarsky, W. (2010). Predictive analytics using a blackboard-based reasoning agent. volume 2, pages 97–100. 2010 IEEE/WIC/ACM International Conference on Web Intelligence and Intelligent Agent Technology. ISSN: null.