

# A Report on Work: Cardiac MRI CBIR for Pathologies Detetion

Tomasz Michno<sup>1</sup> <sup>a</sup> and Michal Jelonek<sup>2</sup>

<sup>1</sup>Kielce University of Technology, Kielce, Poland

<sup>2</sup>Center for Cardiovascular Research and Development, American Heart of Poland, Katowice, Poland

**Keywords:** CBIR, Medical Image Retrieval, Pathology Detection, MRI, Cardiac Magnetic Resonance Imaging.

**Abstract:** The early detection of pathologies in the cardiovascular system is very important. One of the most accurate imaging examinations of human tissues is magnetic resonance imaging (MRI), which is a very precise yet non-invasive test. In order to process MRI images to detect pathologies, one of the most promising methods is Content Based Image Retrieval (CBIR). This paper presents a report on the research on that topic as a result of the Miniatura 5 Grant. The main contributions of the paper are: a review of the state-of-the-art methods, a selection of the most promising image features that may be used to identify pathologies, a description of the proposed system for preparing suggestions for doctors, which takes into consideration also methods for presenting the results, which are most often omitted in other researches. The next step will be incorporating full 3D MRI information into the pipeline.

## 1 INTRODUCTION

Magnetic Resonance Imaging (MRI) is one of the most important tools in medical diagnostics. It is a non-invasive, highly reproducible and accurate method that incorporates the use of a very strong magnetic field which is able to stimulate protons. The physicians are able to change the imaging characteristics by changing its parameters. Moreover, it is possible to obtain images of vessels and arteries using MR Angiography (MRA) (Situ et al., 2019). Cardiac Magnetic Resonance Imaging (CMR) is also able to produce different types of images, including tissue characterization, thrombus and scar capture which provide key information for doctors. Patients are not exposed to ionizing radiation (Peterzan et al., 2016).


There are many heart problems that can be solved by CMR using different settings and imaging types (Salerno and Kramer, 2009; Peterzan et al., 2016). As an example, the presence of coronary artery disease (CAD) (Chang and Kim, 2016), an acute myocardial infarction (AMI) or chronic myocardial infarction (CMI) can be identified with the CMR, which may help in choosing a type of treatment (Peterzan et al., 2016; Tahir et al., 2017). Moreover, CMR is able to capture images for myocardial stress testing (Peterzan et al., 2016) and is helpful in the evaluation of Microvascular Obstruction (Perazzolo Marra

et al., 2010). Another example of CMR usage in heart pathology detection may be the detection of Left Ventricular Thrombus using different types of cardiac magnetic resonance imaging (Chaosuwannakit and Makarawate, 2021).

In order to process MRI images to detect pathologies, one of the most promising methods is Content Based Image Retrieval (CBIR), which is currently used in many fields, such as photography, social networks, databases, but also in medicine. There are researches focused on the diagnosis of various types of pathologies, such as diabetic retinopathy (Sivakamasundari and Natarajan, 2015), breast cancer detection (Carvalho et al., 2020) or some cardiovascular pathological changes (Bergamasco et al., 2015b).

This paper presents a report on work on the Miniatura 5 Grant funded by National Science Center Poland, which is dedicated only to preparing initial research on the method for Cardiac MRI CBIR for pathologies detection. The main contributions of the paper are: a review of the state-of-the-art methods related to the topic, a selection of the most promising image features that may be used to identify pathologies and a description of the proposed system for preparing suggestions for doctors. The research also takes into consideration methods for presenting the results, which are most often omitted.

The next stage of the research will be incorporating full 3D MRI image information into the pipeline

<sup>a</sup>  <https://orcid.org/0000-0001-5437-8728>

in order to improve the results.

The paper is organized as follows: in the next section there are described methods in medical CBIR. The section 2 contains a presentation of the proposed method. Next, the results of initial experiments are shown. The last section contains a summary and description of future work directions.

## 2 LITERATURE OVERVIEW

One of the biggest challenges in medical imaging is detecting pathologies with high certainty. This could be very beneficial for choosing appropriate treatment. Due to the recent advances in computer vision and image processing, there are more and more possible usages of computer aided CMR imaging. There is a great area where a lot of tasks are similar to multimedia database retrieval, which in many cases may be formulated as the problem of Content Based Image Retrieval (CBIR) (Münzer et al., 2016).

One of the main challenges in CBIR is proper image segmentation. This is very crucial, especially in medical image processing, because proper separation of, e.g. desired tissues, may highly increase the precision of a later diagnosis suggestion. For segmentation different algorithms are used, e.g. for 2D images a fuzzy connectedness image segmentation with geometric moments (FCISGMs) may be applied (Atique and Bhagat, 2016). Another idea is to use a region growing process with OTSU thresholding (Ramos et al., 2014). There are also methods using U-Net and CNN networks, e.g. (Guo et al., 2020). Another idea is to first localize and then make segmentation of a 3D Cardiac MRI image using a modified version of the 3D U-Net network named 3D DR-UNet (Vesal et al., 2020). As another example of medical image segmentation, a CXR chest image segmentation using a so called CardioNet may be given (Jafar et al., 2022). Sometimes, for CMR image segmentation, there is also used Fully Convolutional Network (FCN) for semantic segmentation (Bai et al., 2018). There are also methods for CRM image acquisition plane recognition using CNN networks (Margeta et al., 2017) or some novel image analysis techniques, like Radiomics, which use information about shape and tissues characteristics as numerical values (Raisi et al., 2020). Additionally, autoencoder approaches for segmentation are also researched (Wibowo et al., 2022), as well as transfer learning usage (Ankenbrand et al., 2021).

Another problem for medical image CBIR is how to retrieve results after segmentation. There are CBIR systems that are universally designed for different

types of medical images, like CT, MRI, PET or X-Ray. One of the problems here is the computation time, which can be reduced by dividing an image into a set of blocks (Atique and Bhagat, 2016). There is also an affine transformation used for image alignment along with different metrics (Ayyachamy and Manivannan, 2013). As different features mean, standard deviation, entropy, skewness and energy may be used (Ayyachamy and Manivannan, 2013). For the detection of Interstitial Lung Diseases in CT images, not only the information from images may be used but also from radiology reports with extracting textual information (Ramos et al., 2014). Another method may incorporate information from four types of image projections, like Perfusion and Tagged MRI, LT-SENC, HT-SENC and Cine Images. As feature vectors, information about the dynamic range of the image, Image Spectrum Histograms and Image Gradient Projectors may be used (Wael and Fahmy, 2012).

A huge problem in CMR CBIR is using all 3D depth information stored in the volumetric image. In order to overcome this problem, spectral clustering and as a feature vector the 3D Hough Transform Descriptor (3DHTD) have been proposed (Bergamasco et al., 2015b). Another method for querying for 3D cardiac models is based on the Local Shape Distance Descriptor (LSDD) and a bipartite graphs (Bergamasco et al., 2015a). To summarize, the most often used descriptors for cardiac MRI are shape, texture, motion and clinical-based (Delmondes and Nunes, 2022).

There are also cardiac CBIR systems dedicated to 3D echo images (Doppler images) using dimensions of cardiac ventricles and texture properties, such as kurtosis, skewness, edge gradient, color histogram as features (Nandagopalan et al., 2012). There are also methods that decompose medical image features into Discrete Latent Codes using GANs (Kobayashi et al., 2021). For 3D Brain MRI images there are also methods that incorporate dimensionality reduction using so called Loc-VAE (Nishimaki et al., 2022). Another approach for dimensionality reduction may be the 3D convolutional autoencoders (3D-CAE) (Arai et al., 2018). Moreover, there are also SURF, PHOG and VGG16 network based descriptors used to create a one-dimensional vector (Rinaldi and Russo, 2020). For brain images, there are also different features used, like pixel, local and global features that are incorporated together to make one feature vector (Rizvi, 2020). Another example of a deep learning based method may be the usage of Convolutional Siamese Neural Networks for distinguishing between lung cancer and tuberculosis (Zhang et al., 2022). The summary of all the aforementioned methods is shown in Tab. 1.

Table 1: Comparison of chosen CBIR methods.

Research	Supported images	Algorithms/Methods	Metrics
(Atique and Bhagat, 2016)	2D: general CT, MRI, PET, X-Ray	<i>segmentation</i> : CISGMs, <i>features/image retrieval</i> : LEBIR, <i>additional</i> : dividing an image into blocks	no strict information
(Nandagopalan et al., 2012)	2D: cardiac Doppler image, (echocardiography)	<i>segmentation</i> : FKM-SQL algorithm <i>features/image retrieval</i> : dimensions of cardiac ventricles, texture properties, kurtosis, skewness, edge gradient, color histogram, etc.	Euclidean distance
(Ayyachamy and Manivannan, 2013)	2D: brain, chest, liver, limbs CT, MRI, PET, X-Ray, US	<i>segmentation</i> : no information <i>registration</i> : aligning images using affine transformation <i>features/image retrieval</i> : sum of squared distance, mutual information 7 metrics tested	Euclidean, Manhattan, Mahalanobis, Canberra, Bray-curtis, Squared chord, chi-squared distances
(Wael and Fahmy, 2012)	2D: cardiac MRI	<i>segmentation</i> : no information <i>features/image retrieval</i> : Dynamic Range, Image Spectrum Histogram, Image Gradient Projectors <i>additional</i> : detecting the image type (Cine images, LT-SENC, HT-SENC, Tagged MRI and Perfusion MRI)	Euclidean distance
(Ramos et al., 2014)	3D: interstitial lung diseases CT	<i>segmentation</i> : region growing process + OTSU, extracting VOIs <i>features/image retrieval</i> : text distance calculation, local mean, standard deviation, skew, kurtosis <i>additional</i> : supporting CBIR with information from text reports	Euclidean distance
(Bergamasco et al., 2015b)	3D: cardiac MRI	<i>segmentation</i> : Seg3D + ImageVis3D software <i>features/image retrieval</i> : 3DHTD used to extract features <i>additional</i> : method compares 3D models, Spectral clustering is used	Euclidean distance
(Bergamasco et al., 2015a)	3D: cardiac MRI	<i>segmentation</i> : Seg3D + ImageVis3D software <i>features/image retrieval</i> : LSDD <i>additional</i> : a bipartite graph is constructed form two 3D models	Euclidean and Manhattan distances
(Kobayashi et al., 2021)	2D: glioma/brain MRI	<i>segmentation</i> : segmentation decoder <i>features/image retrieval</i> : autoencoder, decomposing into normal and abnormal anatomy codes <i>additional</i> : semantic components decomposition	Euclidean distance
(Nishimaki et al., 2022)	3D: brain MRI	<i>segmentation and features/image retrieval</i> : localized variational autoencoder (Loc-VAE) <i>additional</i> : dimensionality reduction method	not applicable
(Rinaldi and Russo, 2020)	2D: general MRI, X-Ray, TAC	<i>segmentation</i> : no information <i>features/image retrieval</i> : descriptors: SURF, PHOG, VGG16-based	cosine distance
(Rizvi, 2020)	2D: brain MRI	<i>segmentation</i> : no strict information <i>features/image retrieval</i> : pixel, local and global features	no information
(Arai et al., 2018)	3D: brain MRI	<i>segmentation and features/image retrieval</i> : 3D convolutional autoencoder <i>additional</i> : dimensionality reduction method	not applicable
(Zhang et al., 2022)	2D: lungs CT	<i>segmentation and features/image retrieval</i> : CSNN	L2 norm distance

Most of the research on Medical CBIR does not consider the issue of preparing efficient visualizations for doctors. However, this is a very crucial part of the system because it helps in a faster and more pre-

cise understanding of the obtained results. One of the methods that can be used for a medical diagnosis report is a Venn-style diagram (Huang et al., 2020). Especially in cardiac reports, there are used Bull's Eye

Plots as well as 2D and 3D maps (Kreiser et al., 2018). There are also some reports where there is a need to annotate uncertainties on images, e.g. using different colors or grayscale areas (Gillmann et al., 2021).

### 3 PROPOSED CBIR METHOD FOR DIAGNOSTICS

The main goal of the research is to prepare an initial method for efficient and precise providing suggestions for doctors with graphical, easy to understand results presentation. Due to the fact that this task is very complex, as the first stage making a review of the state-of-the-art methods and preparing an initial 2D method was chosen, which has been presented in this paper. The next step will be preparing research on the 3D method.

The proposed system consists of the following logical modules: preprocessing and segmentation, feature extraction, the CBIR suggestion module and visualization module. All of the modules are described in more detail in the following subsections.

#### 3.1 Preprocessing and Segmentation

In Computer Vision and Image Processing one of the most important steps is the proper preparation of the image for further processing and analysis. One of the types of segmentation that has been considered is neural network based. For such an approach, the U-Net architecture has been chosen, which is one of the most efficient image segmentation methods in medical imaging (Siddique et al., 2021), (Tong et al., 2018). Additionally for higher performance, it can be supported by other network architectures like R-CNN (Xu et al., 2018).

One of the problems that may occur during U-Net usage is the complexity of the input data. In order to reduce it but also to leave different pixel values in tissues, the Mean shift segmentation has been proposed as an initial image preprocessing step before using it as an input for the U-Net. The idea of heart extraction and example result is shown in Fig. 1.

During the research, we also noticed the problem of image alignment and registration. Images captured during acquisition may have different orientations and scalings. For more precise work with different algorithms from the pipeline, there may be at least some rotation needed. There are many researches dedicated to image registration using more classical approaches (Hill et al., 2001) or Deep Learning (Fu et al., 2020). During this initial research, that topic was not taken

into consideration and was left for further development - all images were rotated manually by a human.

Another idea that has been considered during the research is the MRI image type detection. It has been proved that such an additional step can improve the overall precision of obtained results (Wael and Fahmy, 2012), thus it was added to the pipeline. A pre-trained CNN neural network is used in order to detect image type, which may be e.g. a cine-SSFP or TSE image. This step is important because it helps to separate the pipeline for more precise training models for heart extraction from an MRI image.

#### 3.2 Features Extraction

Extracting features from the image is one of the most crucial parts of Content Based Image Retrieval systems. Choosing proper features may greatly improve the precision of returned results. After analysis of the aforementioned state-of-the-art methods, described in Section 2, the most promising ones were chosen.

Statistical and global features are able to represent information about some features that describes the image globally like the mean pixel value or the characteristic of the image histogram. Additionally, with e.g. Gabor filters, they are able to compare different textures present in images (Barbu, 2009). Global features are commonly and successfully used in CBIR methods (Varish and Pal, 2015).

Another types of features which are very promising are heart-based. Some diseases are characterized by e.g. overgrowth of one of the cardiac ventricles and such information may be crucial for precise diagnosis. Due to that fact, we propose to use two types of features: proportions of heart width and height and proportions of heart ventricles. There are some algorithms for automatic heart ventricles segmentation (Peng et al., 2016) and measurement (Wang et al., 2019). Extracting these features automatically from images will be researched in the future and at this stage has been done manually.

It has been proven that Scale-Invariant Feature Transform (SIFT), Orientated FAST and Robust BRIEF (ORB) or Speeded Up Robust Feature (SURF) descriptors are able to provide precise results for CBIR (Chhabra et al., 2020). Due to that fact, they are also promising for their usage in the medical CBIR.

The last type of considered feature descriptors are neural network-based descriptors. Recently Deep Learning methods are becoming more and more popular in many areas, including Content Based Image Retrieval systems (Staszewski et al., 2021; Rinaldi and Russo, 2020). For extracting deep features, most often VGG-16 and VGG-19 are used.

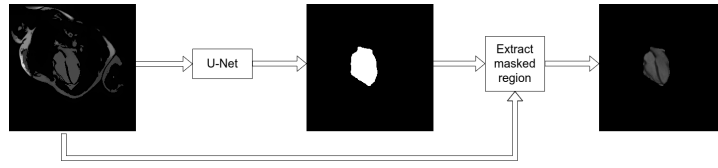


Figure 1: Heart mask generation and extraction from the MRI image. Images represent actual trained U-Net results. Original MRI image source: (Campello et al., 2021).

Choosing proper descriptors is not the only problem in feature extraction. Another crucial thing is the selection of the area of the image from which these features should be extracted. During the initial research, it was discovered that higher precision could be obtained using an extracted heart image. Moreover, because the neighboring area to the extracted heart may contain some important data for image processing and classification, we propose to use them together with the heart features, creating a "ring" around the extracted heart.

### 3.3 Making Recommendations for Doctors

Preparing recommendations for doctors is a very complex task. When CBIR is used, one of the main problems is: storing features together with images and querying the database in an efficient way (Deniziak and Michno, 2019). In this research, we focused only on the querying part, with a simple database structure based on a vector. A more thorough investigation on how to efficiently store information about images will be done in future research.

The CBIR suggestions module works as follows: firstly, as an input retrieve MRI type and feature vector. Next, all images of the same MRI type are selected. After that, for each image and feature set  $s \in (\text{heart}, \text{ring})$ :

a) find the L2 norm distance between input feature vector  $|a|$  and feature vector of the image from database  $|b|$  using following equation:

$$\text{dist}_s(|a|, |b|) = \sqrt{\sum_{k=0}^n a_k - b_k^2}, \quad (1)$$

b) compute the total distance:

$$\text{val}_a = 0.75 \cdot \text{dist}_{\text{heart}}(|a|, |b|) \quad (2)$$

$$\text{val}_b = 0.25 \cdot \text{dist}_{\text{ring}}(|a|, |b|) \quad (3)$$

$$\text{dist}(|a|, |b|) = \text{val}_a + \text{val}_b, \quad (4)$$

c) store id of the image from database together with total distance.

Next all stored distances are sorted and top 5 of them are selected and returned as a main disease suggestion.

The metadata connected with the images contains the main cardiac disease and a list of other problems that a patient may have, like thick adipose tissue or a past myocardial infarction.

What was not covered by most of the researches is data visualization for doctors. This is done by the last system's module, Visualization Module, which as an input receives data about the five most similar images together with their metadata.

The module generates charts that contains recommendation for doctors. Because some diagrams may show information more clearly, three types of charts are generated: pie chart, words cloud, bar chart.

The idea of showing more than one diagram is to choose the most efficient one after consultations with different doctors, which should be covered in future research. During the research it occurred that it may be helpful to not only show suggestions about the main disease that is present on the MRI image, but also some additional information that may be connected to the patient. Thus, there are generated two sets of charts: one containing the main disease and the other showing all stored additional information.

## 4 INITIAL EXPERIMENTS

Due to the main idea of the Miniatura 5 grant, which is gathering knowledge and performing some initial research that is designated to be highly extended by future research, more theoretical considerations have been made and only initial experiments have been performed using the dataset (Campello et al., 2021).

One set of tests was dedicated to checking which type of segmentation would be most suitable for initially preprocessing the image in order to make the heart more significant than the background and other tissues. For initial preprocessing, the following segmentation algorithms have been considered: K-Means, DBSCAN, OTSU, Mean shift, Watershed (with OTSU thresholding applied before to the image), U-Net. The example segmentation results for the unsupervised methods are shown in Fig. 2. As can be seen, each algorithm, except DBSCAN, was able to segment the heart from other tissues. Another type of test was made in order to check the U-Net

based segmentation, which proved the high efficiency of that method.




Figure 2: The results of different segmentation algorithms. Original MRI image source: (Campello et al., 2021).

In order to test the idea of MRI image type detection, a CNN neural network has been implemented using Python and Keras library. Cine and LV images from (Campello et al., 2021) has been chosen for training and testing the network. The average precision for LV images was 0.87 and for Cine images was 0.83. This results should be improved by tuning the parameters and architecture of the network.

Another experiments were made in order to initially test module for generating suggestions for doctors. As features mean, variance, median, kurtosis, skewness has been chosen. During the tests, it has been seen that the variance values are not able to be used for differentiating classes of images on its own. The results for kurtosis were much better, but for Congenital Arrhythmogenesis class the differences were still high. This should be investigated more during future research together with using Gabor filters.

The next tests were performed to create suggestions using CBIR. Four types of queries have been made in order to check if the system proposes the correct disease. For the Hypertrophic Cardiomyopathy, Tetralogy of Fallot and Dilated Left Ventricle the system proposed correct suggestions. The problematic one was Calcaneal insufficiency avulsion, where the system was not certain about the disease and proposed all classes with the same probability. This may be the result of an insufficient number of features - as a further research direction it should be investigated which ones should be the most suitable.

The last set of experiments has been made to test the correction of chart generation. For that purpose, the Matplotlib was used to generate bar and pie charts and WordCloud for generating word clouds. The module was tested to see if it generates correct charts for specified data - for each query it was successful.

## 5 CONCLUSIONS

In this paper, a report on work on Cardiac MRI CBIR Retrieval for pathology detection has been presented. During the research, a review of different methods that are applied to medical CBIR has been made. Next, all of them were analyzed for used segmentation, features and metrics for comparisons. Additionally, an initial method for CBIR has been proposed that includes: a selection of the most promising image features that can be extracted from MRI images with the proposition of using the closest heart's neighboring pixels, a description of the comparison and suggestion method together with results visualization and an overview of the architecture of the proposed system.

Moreover, some initial experiments were performed in order to check the main assumptions of the proposed method. The results showed that for image segmentation and heart extraction, the U-Net based method should be sufficient. However, the feature set should be investigated more thoughtfully in order to find the features that have the best performance when comparing images connected to different diseases.

When analyzing existing methods and working on the research, there appeared many further directions and ideas. Not only improving the performance of the feature set should be made, but also some efficient metrics for comparing them during CBIR comparison phase. More work should also be done in order to check if an additional feature set for the heart's neighboring area may improve the precision of suggestions or not. Another way of improving the results may be by adding information extracted from e.g. ECG analysis or patient information, like e.g. age. Moreover, because at this stage only 2D images were used, another future research direction will be using whole 3D MRI image data together with the time series.

## ACKNOWLEDGEMENTS

For T. Michno this research was funded by "Miniatura 5" grant from the Polish National Science Centre (ID 533304; No. 2021/05/X/ST6/01794).

## REFERENCES

- Ankenbrand, M. J., Lohr, D., Schlötelburg, W., Reiter, T., Wech, T., and Schreiber, L. M. (2021). Deep learning-based cardiac cine segmentation: Transfer learning application to 7T ultrahigh-field MRI. *Magnetic Resonance in Medicine*, 86:2179–2191.

- Arai, H., Chayama, Y., Iyatomi, H., and Oishi, K. (2018). Significant Dimension Reduction of 3D Brain MRI using 3D Convolutional Autoencoders. volume 2018, pages 5162–5165.
- Atique, M. and Bhagat, A. P. (2016). A Novel Localized Entropy-based Medical Image Retrieval. *IETE Journal of Research*, 62(5):721–732.
- Ayyachamy, S. and Manivannan, V. S. (2013). Medical image registration-based retrieval using distance metrics. *International Journal of Imaging Systems and Technology*, 23(4):360–371.
- Bai, W., Sinclair, M., Tarroni, G., Oktay, O., Rajchl, M., Vaillant, G., Lee, A. M., Aung, N., Lukaschuk, E., Sanghvi, M. M., Zemrak, F., Funk, K., Paiva, J. M., Carapella, V., Kim, Y. J., Suzuki, H., Kainz, B., Matthews, P. M., Petersen, S. E., Piechnik, S. K., Neubauer, S., Glocker, B., and Rueckert, D. (2018). Automated cardiovascular magnetic resonance image analysis with fully convolutional networks. *Journal of Cardiovascular Magnetic Resonance*, 20(1):65.
- Barbu, T. (2009). Content-based image retrieval using Gabor filtering. *Proceedings - International Workshop on Database and Expert Systems Applications, DEXA*, pages 236–240.
- Bergamasco, L. C., Oliveira, H., Biscaro, H., Wechsler, H., and Nunes, F. L. (2015a). Using Bipartite Graphs for 3D Cardiac Model Retrieval. In *2015 IEEE 28th International Symposium on Computer-Based Medical Systems*, pages 232–237.
- Bergamasco, L. C., Oliveira, R. A., Wechsler, H., Dajuda, C., Delamaro, M., and Nunes, F. L. (2015b). Content-Based Image Retrieval of 3D Cardiac Models to Aid the Diagnosis of Congestive Heart Failure by Using Spectral Clustering. In *2015 IEEE 28th International Symposium on Computer-Based Medical Systems*, pages 183–186.
- Campello, V. M., Gkontra, P., Izquierdo, C., Martin-Isla, C., Sojoudi, A., Full, P. M., Maier-Hein, K., Zhang, Y., He, Z., Ma, J., Parreno, M., Albiol, A., Kong, F., Shadden, S. C., Acero, J. C., Sundaresan, V., Saber, M., Elattar, M., Li, H., Menze, B., Khader, F., Haarbuerger, C., Scannell, C. M., Veta, M., Carscadden, A., Punithakumar, K., Liu, X., Tsaftaris, S. A., Huang, X., Yang, X., Li, L., Zhuang, X., Vilades, D., Descalzo, M. L., Guala, A., Mura, L. L., Friedrich, M. G., Garg, R., Lebel, J., Henriques, F., Karakas, M., Cavus, E., Petersen, S. E., Escalera, S., Segui, S., Rodriguez-Palomares, J. F., and Lekadir, K. (2021). Multi-Centre, Multi-Vendor and Multi-Disease Cardiac Segmentation: The M&Ms Challenge. *IEEE Transactions on Medical Imaging*, 40:3543–3554.
- Carvalho, E. D., Filho, A. O., Silva, R. R., Araújo, F. H., Diniz, J. O., Silva, A. C., Paiva, A. C., and Gattass, M. (2020). Breast cancer diagnosis from histopathological images using textural features and CBIR. *Artificial Intelligence in Medicine*, 105:101845.
- Chang, S.-A. and Kim, R. (2016). The Use of Cardiac Magnetic Resonance in Patients with Suspected Coronary Artery Disease: A Clinical Practice Perspective. *Journal of Cardiovascular Ultrasound*, 24:96.
- Chaosuwannakit, N. and Makarawate, P. (2021). Left Ventricular Thrombi: Insights from Cardiac Magnetic Resonance Imaging. *Tomography*, 7(2):180–188.
- Chhabra, P., Garg, N. K., and Kumar, M. (2020). Content-based image retrieval system using ORB and SIFT features. *Neural Computing and Applications*, 32:2725–2733.
- Delmondes, P. H. M. and Nunes, F. L. S. (2022). A systematic review of multi-slice and multi-frame descriptors in cardiac MRI exams. *Computer Methods and Programs in Biomedicine*, 221:106889.
- Deniziak, R. S. and Michno, T. (2019). World wide web cbir searching using query by approximate shapes. In Rodríguez, S., Prieto, J., Faria, P., Kłos, S., Fernández, A., Mazuelas, S., Jiménez-López, M. D., Moreno, M. N., and Navarro, E. M., editors, *Distributed Computing and Artificial Intelligence, Special Sessions, 15th International Conference*, pages 87–95, Cham. Springer International Publishing.
- Fu, Y., Lei, Y., Wang, T., Curran, W. J., Liu, T., and Yang, X. (2020). Deep learning in medical image registration: a review. *Physics in Medicine & Biology*, 65(20):20TR01.
- Gillmann, C., Saur, D., Wischgoll, T., and Scheuermann, G. (2021). Uncertainty-aware Visualization in Medical Imaging - A Survey. *Computer Graphics Forum*, 40:665–689.
- Guo, F., Ng, M., Goubran, M., Petersen, S. E., Piechnik, S. K., Neubauer, S., and Wright, G. (2020). Improving cardiac MRI convolutional neural network segmentation on small training datasets and dataset shift: A continuous kernel cut approach. *Medical Image Analysis*, 61:101636.
- Hill, D. L. G., Batchelor, P. G., Holden, M., and Hawkes, D. J. (2001). Medical image registration. *Physics in Medicine & Biology*, 46(3):R1.
- Huang, J.-H., Yang, C.-H. H., Liu, F., Tian, M., Liu, Y.-C., Wu, T.-W., Lin, I.-H., Wang, K., Morikawa, H., Chang, H., Tegner, J., and Worring, M. (2020). DeepOphT: Medical Report Generation for Retinal Images via Deep Models and Visual Explanation.
- Jafar, A., Hameed, M. T., Akram, N., Waqas, U., Kim, H. S., and Naqvi, R. A. (2022). CardioNet: Automatic Semantic Segmentation to Calculate the Cardiothoracic Ratio for Cardiomegaly and Other Chest Diseases. *Journal of Personalized Medicine*, 12(6).
- Kobayashi, K., Hataya, R., Kurose, Y., Miyake, M., Takahashi, M., Nakagawa, A., Harada, T., and Hamamoto, R. (2021). Decomposing Normal and Abnormal Features of Medical Images into Discrete Latent Codes for Content-Based Image Retrieval. *CoRR*, abs/2103.12328.
- Kreiser, J., Meuschke, M., Mistelbauer, G., Preim, B., and Ropinski, T. (2018). A Survey of Flattening-Based Medical Visualization Techniques. *Computer Graphics Forum*, 37:597–624.
- Margeta, J., Criminisi, A., Lozoya, R. C., Lee, D., and Ayache, N. (2017). Fine-tuned convolutional neural nets for cardiac MRI acquisition plane recognition. *Computer Methods in Biomechanics and Biomedical Engineering: Imaging & Visualization*, 5(5):339–349.

- Münzer, B., Schöffmann, K., and Böszörményi, L. (2016). Content-based processing and analysis of endoscopic images and videos: A survey. *Multimedia Tools and Applications*, 77:1323–1362.
- Nandagopalan, S., Adiga, B. S., Sudarshan, T. S. B., Dhanalakshmi, C., and Manjunath, C. N. (2012). A content-based image retrieval system for echo images using SQL-based clustering approach. *The Imaging Science Journal*, 60(5):256–271.
- Nishimaki, K., Ikuta, K., Onga, Y., Iyatomi, H., and Oishi, K. (2022). Loc-VAE: Learning Structurally Localized Representation from 3D Brain MR Images for Content-Based Image Retrieval.
- Peng, P., Lekadir, K., Gooya, A., Shao, L., Petersen, S., and Frangi, A. (2016). A review of heart chamber segmentation for structural and functional analysis using cardiac magnetic resonance imaging. *Magnetic Resonance Materials in Physics, Biology and Medicine* 2016 29:2, 29:155–195.
- Perazzolo Marra, M., Lima, J. A., and Iliceto, S. (2010). MRI in acute myocardial infarction. *European Heart Journal*, 32(3):284–293.
- Peterzan, M. A., Rider, O. J., and Anderson, L. J. (2016). The role of cardiovascular magnetic resonance imaging in heart failure. *Cardiac failure review*, 2(2):115.
- Raisi, Z., Izquierdo, C., Campello, V., Martin-Isla, C., Jaggi, A., Harvey, N., Lekadir, K., and Petersen, S. (2020). Cardiac magnetic resonance radiomics: Basic principles and clinical perspectives. *European Heart Journal*, 21.
- Ramos, J., Kockelkorn, T., Ramos, I., Ramos, R., Ginneken, B., Viergever, M., Campilho, A., and Grutters, J. (2014). Content-Based Image Retrieval by Metric Learning From Radiology Reports: Application to Interstitial Lung Diseases. *IEEE journal of biomedical and health informatics*, 20.
- Rinaldi, A. M. and Russo, C. (2020). A Content Based Image Retrieval Approach based on Multiple Multimedia Features Descriptors in E-health Environment. In *2020 IEEE International Symposium on Medical Measurements and Applications (MeMeA)*, pages 1–6.
- Rizvi, D. Q. (2020). Analysis of human brain by magnetic resonance imaging using content-based image retrieval. *International journal of health sciences*, 14:3–9.
- Salerno, M. and Kramer, C. M. (2009). Advances in cardiovascular MRI for diagnostics: applications in coronary artery disease and cardiomyopathies. *Expert opinion on medical diagnostics*, 3(6):673–687.
- Siddique, N., Paheding, S., Elkin, C. P., and Devabhaktuni, V. (2021). U-Net and Its Variants for Medical Image Segmentation: A Review of Theory and Applications. *IEEE Access*, 9:82031–82057.
- Situ, Y., Birch, S. C. M., Moreyra, C., and Holloway, C. J. (2019). Cardiovascular magnetic resonance imaging for structural heart disease. *Cardiovascular Diagnosis and Therapy*, 10(2).
- Sivakamasundari, J. and Natarajan, V. (2015). Content Based retinal Image Retrieval scheme using Harmony Search Algorithm. *2015 International Conference on Communication and Signal Processing, ICCSP 2015*, pages 607–611.
- Staszewski, P., Jaworski, M., Cao, J., and Rutkowski, L. (2021). A New Approach to Descriptors Generation for Image Retrieval by Analyzing Activations of Deep Neural Network Layers. *IEEE Transactions on Neural Networks and Learning Systems*.
- Tahir, E., Sinn, M., Bohnen, S., Avanesov, M., Säring, D., Stehning, C., Schnackenburg, B., Eulenburg, C., Wien, J., Radunski, U. K., Blankenberg, S., Adam, G., Higgins, C. B., Saeed, M., Muellerleile, K., and Lund, G. K. (2017). Acute versus Chronic Myocardial Infarction: Diagnostic Accuracy of Quantitative Native T1 and T2 Mapping versus Assessment of Edema on Standard T2-weighted Cardiovascular MR Images for Differentiation. *Radiology*, 285(1):83–91. PMID: 28678672.
- Tong, Q., Ning, M., Si, W., Liao, X., and Qin, J. (2018). 3D deeply-supervised U-net based whole heart segmentation. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*, 10663 LNCS:224–232.
- Varish, N. and Pal, A. K. (2015). Content based image retrieval using statistical features of color histogram. *2015 3rd International Conference on Signal Processing, Communication and Networking, ICSCN 2015*.
- Vesal, S., Maier, A., and Ravikumar, N. (2020). Fully Automated 3D Cardiac MRI Localisation and Segmentation Using Deep Neural Networks. *Journal of Imaging*, 6(7).
- Wael, M. and Fahmy, A. S. (2012). Cardiac magnetic resonance image classification and retrieval based on the image acquisition technique. In *2012 Cairo International Biomedical Engineering Conference (CIBEC)*, pages 126–129.
- Wang, Y., Zhang, Y., Xuan, W., Kao, E., Cao, P., Tian, B., Ordovas, K., Saloner, D., and Liu, J. (2019). Fully automatic segmentation of 4D MRI for cardiac functional measurements. *Medical Physics*, 46:180–189.
- Wibowo, A., Triadyaksa, P., Sugiharto, A., Sarwoko, E. A., Nugroho, F. A., Arai, H., and Kawakubo, M. (2022). Cardiac Disease Classification Using Two-Dimensional Thickness and Few-Shot Learning Based on Magnetic Resonance Imaging Image Segmentation. *Journal of Imaging*, 8.
- Xu, Z., Wu, Z., and Feng, J. (2018). CFUN: combining faster R-CNN and u-net network for efficient whole heart segmentation. *CoRR*, abs/1812.04914.
- Zhang, K., Qi, S., Cai, J., Zhao, D., Yu, T., Yue, Y., Yao, Y., and Qian, W. (2022). Content-based image retrieval with a Convolutional Siamese Neural Network: Distinguishing lung cancer and tuberculosis in CT images. *Computers in Biology and Medicine*, 140:105096.